


Flexible LED Light Strips

24V 3000K CRI 85 Double Row Strip Light Series

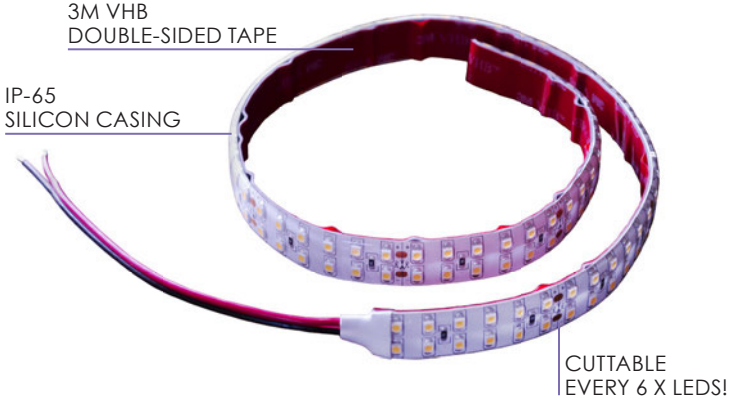

TrueColor® Flexible LED Light Strips are an incredible, multi-purpose, total lighting solution for anywhere and everywhere, including backlit LED mirrors and accent lighting.

FEATURES

- 24V Constant Current Design
- Long Lifetime, L70>50,000 Hours
- Instant On, No Flicker, Mercury Free, No UV
- Cuttable Every 6 x LEDs
- Glass free for safer working conditions
- Standard Sizes Every 1/2M
- Durable, 3M VHB Double-Sided Tape
- Operating Temperature from -13°F to 140°F
- Exceptional Color Accuracy, CRI 85
- CRI 95 and 2700K available for custom orders
- Vertically Integrated Manufacturing Process, Precise Binning of LED Diodes
- IP-65 Rated for Wet and Humid Environments
- 5-Year Manufacturer's Limited Warranty
- UL Recognized Component, CE and RoHS Compliant



5-Year Limited Warranty



*Dimmable with compatible 24V constant voltage dimmable LED drivers only. Speak to a CLEANLIFE® representative for more information.

APPLICATION INFORMATION

Applications

- Indoor
- Outdoor
- Accent Lighting
- Signage
- Enclosed Locations
- Backlit Mirrors

Market Segments

- All



Flexible



Easy to Install



Energy Saving



Robust Design

SPECIFICATIONS

Dimensions	See Table
Beam Angle	120°
Operating Temp.	-13°F~+140°F
Efficacy	74 LPW
Application	Indoor/Outdoor
Power Supply	24V Constant Voltage
Fastening	3M VHB Double-Sided Tape
Rating	IP-65
Warranty	5-year Manufacturer's Limited


Color Temperature



3000K



CLEANLIFE® LED

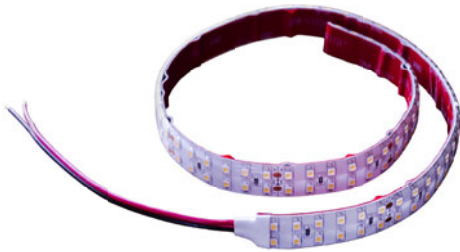


Project/Job	Notes
Date	
Comments	
Prepared by	

Ordering Information

Part Number	Length (M)	Power (W)	Input Voltage (V)	Average Rated Life (hrs.)	CCT (±175)	Typical Lumens (lm) (+10%)	CRI (±5)	Backing	Lumens Per Watt
TC-TLS2435010 (85 CRI)	0.5	9.6	24V DC	L70>50,000	3045K	710	85	3M Tape	74
TC-TLS2435019 (85 CRI)	1	19.2	24V DC	L70>50,000	3045K	1420	85	3M Tape	74
TC-TLS2435029 (85 CRI)	1.5	28.8	24V DC	L70>50,000	3045K	2130	85	3M Tape	74
TC-TLS2435038 (85 CRI)	2	38.4	24V DC	L70>50,000	3045K	2840	85	3M Tape	74
TC-TLS2435048 (85 CRI)	2.5	48	24V DC	L70>50,000	3045K	3550	85	3M Tape	74
TC-TLS2435058 (85 CRI)	3	57.6	24V DC	L70>50,000	3045K	4260	85	3M Tape	74
TC-TLS2435067 (85 CRI)	3.5	67.2	24V DC	L70>50,000	3045K	4970	85	3M Tape	74
TC-TLS2435077 (85 CRI)	4	76.8	24V DC	L70>50,000	3045K	5680	85	3M Tape	74
TC-TLS2435086 (85 CRI)	4.5	86.4	24V DC	L70>50,000	3045K	6390	85	3M Tape	74
TC-TLS2435096 (85 CRI)	5	96	24V DC	L70>50,000	3045K	7100	85	3M Tape	74

Tape Light Dimensions

Part Number	(A) Length (M)	(B) Width (MM)
TC-TLS2435010 (85 CRI)	0.5	15.0
TC-TLS2435019 (85 CRI)	1.0	15.0
TC-TLS2435029 (85 CRI)	1.5	15.0
TC-TLS2435038 (85 CRI)	2.0	15.0
TC-TLS2435048 (85 CRI)	2.5	15.0
TC-TLS2435058 (85 CRI)	3.0	15.0
TC-TLS2435067 (85 CRI)	3.5	15.0
TC-TLS2435077 (85 CRI)	4.0	15.0
TC-TLS2435086 (85 CRI)	4.5	15.0
TC-TLS2435096 (85 CRI)	5.0	15.0

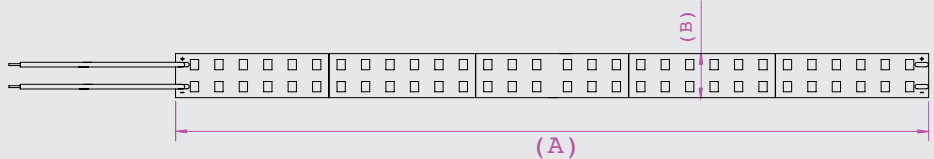

CLEANLIFE® ENERGY LLC
 1-800-316-2532
 support@cleanlifeled.com
 www.cleanlifeled.com

CLEANLIFE® and the Pinwheel Mark are registered trademarks of CLEANLIFE® ENERGY LLC. All Rights Reserved. Not to be reproduced or published without prior permission.

PLEASE NOTE: Product specifications are based off of third party test reports and are subject to change without notice.



CLEANLIFE® LED