


# T5 LED Light Tubes

36V High Output 3000K CRI 85 Series



CLEANLIFE® LED

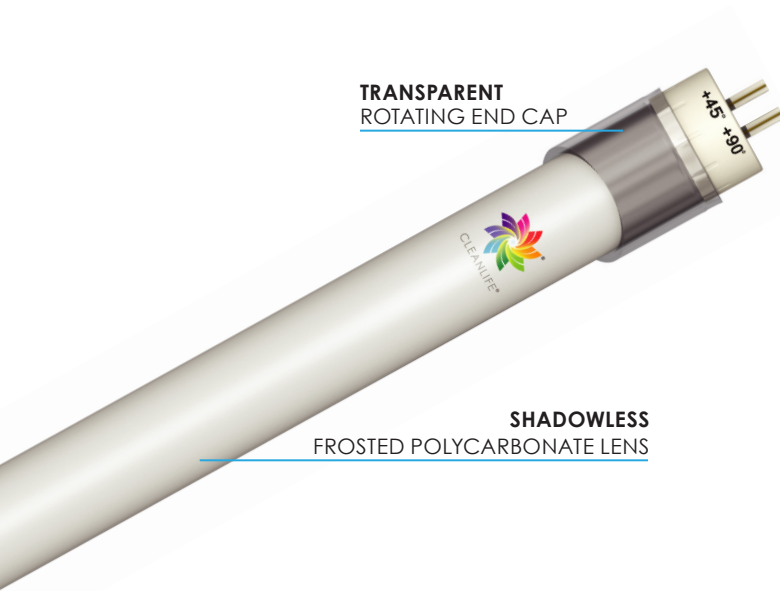

**TRANSPARENT  
ROTATING END CAP**

**SHADOWLESS  
FROSTED POLYCARBONATE LENS**



**15-Year Limited Warranty**

*\*Dimmable with compatible 24V constant voltage dimmable LED drivers only. Speak to a CLEANLIFE® representative for more information.*

Save money and energy by switching to CLEANLIFE® T5 LED Light Tubes for all homes, hotels, offices, cafes, backlit mirrors or anywhere T5 fluorescent light tubes are being used.

## FEATURES

- 36V Constant Current Design
- Long Lifetime, L70>50,000 Hours
- Instant On, No Flicker, Mercury Free, No UV
- High Efficacy, Up to 123 LPW
- Polycarbonate, frosted lens cover for even light distribution
- Glass free for safer working conditions
- Available in all standard T5 lengths as well as custom lengths, No MOQ Required
- Rotating end caps for targeted beam angle
- >180° Beam Angle, No hot spots!
- Operating Temperature from -13°F to +122°F
- Exceptional Color Accuracy, CRI 85
- CRI 95 and 2700K available for custom orders
- Energy savings of up to 66%\*
- 15-Year Manufacturer's Limited Warranty
- UL Recognized Component, CE and RoHS Compliant

*\*Compared with Traditional T5 Fluorescent Lamp Systems*

## SPECIFICATIONS

<b>Dimensions</b>	See Table
<b>Beam Angle</b>	>180°
<b>Operating Temp.</b>	-13°F~+122°F
<b>Efficacy</b>	123 LPW
<b>Application</b>	Indoor
<b>Power Supply</b>	36V Constant Voltage
<b>Warranty</b>	15-year Manufacturer's Limited

## Color Temperature



3000K



Ultra Bright



Rotatable



Energy Saving



Robust Design



CLEANLIFE® LED



Project/Job	Notes
Date	
Comments	
Prepared by	

Ordering Information

Part Number	Length (IN)	Power (W)	Input Voltage (V)	Average Rated Life (hrs.)	CCT (±175)	Typical Lumens (lm) (+10%)	CRI (±5)	Base	Lumens Per Watt
CL-T5F10-30K-22DC36 (280mA) (85 CRI)	22	10	36V DC	L70>50,000	3045K	1230	85	G5	123
CL-T5F17-30K-34DC36 (460mA) (85 CRI)	34	17	36V DC	L70>50,000	3045K	2091	85	G5	123
CL-T5F22-30K-46DC36 (610mA) (85 CRI)	46	22	36V DC	L70>50,000	3045K	2706	85	G5	123
CL-T5F27-30K-58DC36 (760mA) (85 CRI)	58	27	36V DC	L70>50,000	3045K	3321	85	G5	123

Tube Dimensions

Part Number	(A) Length (in.)
CL-T5F10-30K-22DC36 (280mA) (85 CRI)	22.20
CL-T5F17-30K-34DC36 (460mA) (85 CRI)	34.00
CL-T5F22-30K-46DC36 (610mA) (85 CRI)	45.80
CL-T5F27-30K-58DC36 (760mA) (85 CRI)	57.60

**CLEANLIFE® ENERGY LLC**  
 1-800-316-2532  
 support@cleanlifeled.com  
 www.cleanlifeled.com

CLEANLIFE® and the Pinwheel Mark are registered trademarks of CLEANLIFE® ENERGY LLC. All Rights Reserved. Not to be reproduced or published without prior permission.

PLEASE NOTE: Product specifications are based off of third party test reports and are subject to change without notice.



CLEANLIFE® LED